

linealight
COLLECTION


MISTY



COMPACT IP65 LIGHT

Misty è una nuova famiglia di lampade compatte da parete o soffitto, con grado di protezione IP65. Ideali in contesti residenziali e contract, si integrano facilmente in ambienti sia riparati sia esposti agli agenti atmosferici, oltre che nelle aree comuni (interne o esterne) di condomini e complessi abitativi.

Misty is a new family of compact wall- or ceiling-mounted luminaires with an IP65 rating. Ideal for residential or contract settings, they adapt effortlessly to both sheltered and weather-exposed areas, as well as to shared spaces (indoors or outdoors) in apartment buildings and multi-unit complexes.

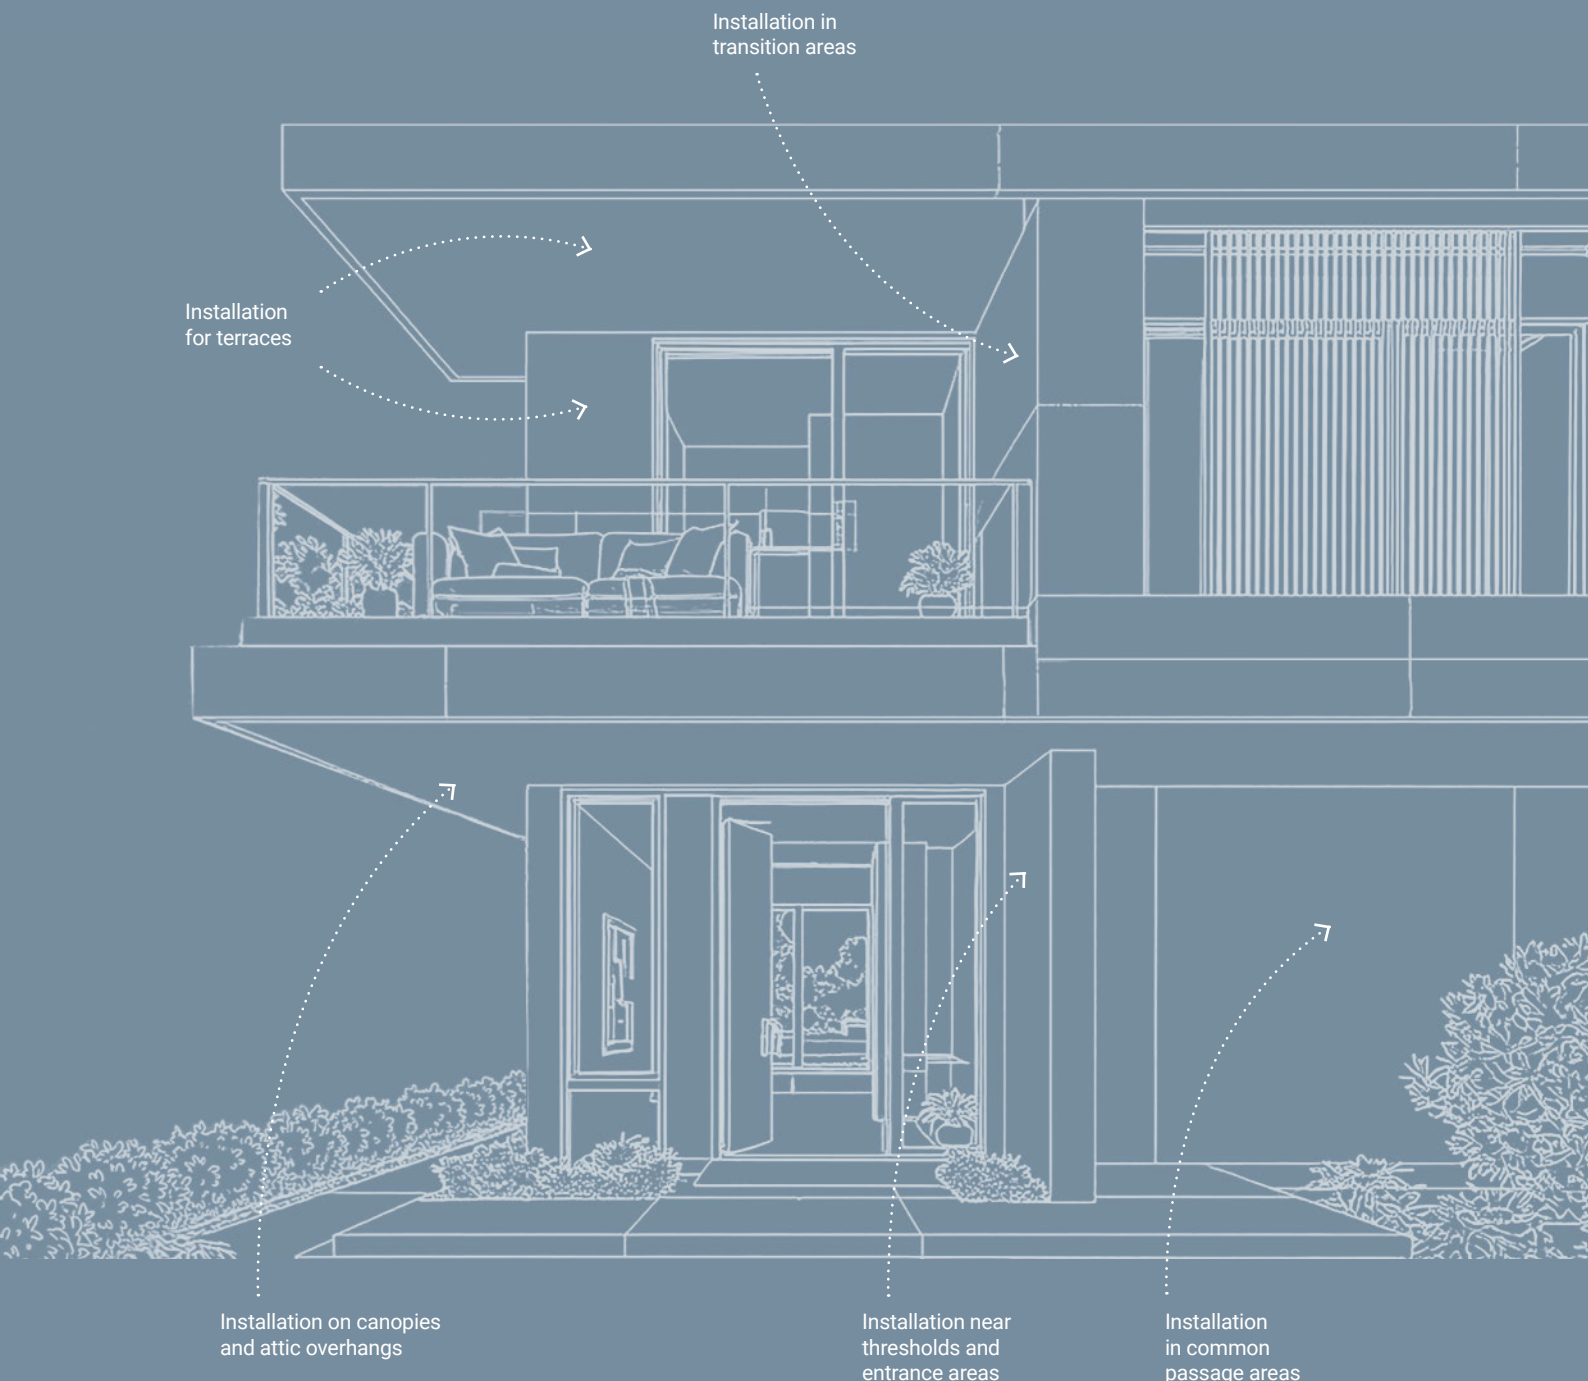




SMART INSTALLATION

Disponibile a scelta in forma quadrata oppure rotonda, Misty presenta montatura in policarbonato in tre diverse finiture e diffusore in policarbonato opalino per una distribuzione morbida ed omogenea della luce.

Available in either a square or round version, Misty features a polycarbonate body in three different finishes and an opal polycarbonate diffuser for a soft, uniform light distribution.

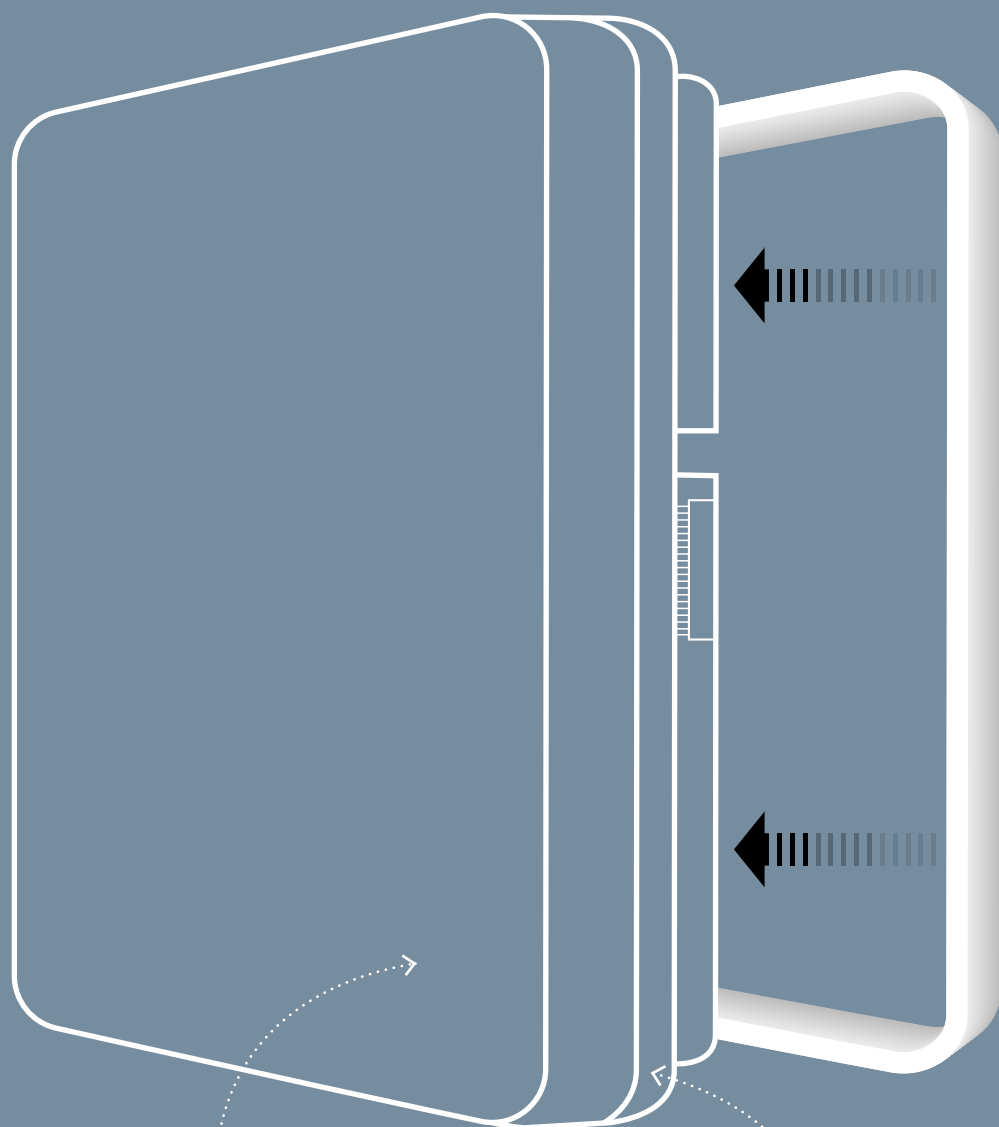

Sleeve for uneven surfaces

In dotazione viene fornita una guaina in gomma espansa, in tinta con il corpo lampada. Facile da installare e rimuovere, è pensata per il montaggio su pareti irregolari. Inserita nell'apposito alloggiamento, si adatta alla superficie assicurando un'installazione pulita e aderente. Agisce anche come guarnizione aggiuntiva contro infiltrazioni di acqua o corpi estranei.

A sleeve made of expanded rubber, matching the color of the lamp body, is supplied as standard. Easy to install and remove, it is designed for mounting on uneven walls. When fitted into its dedicated housing, it conforms to the surface, ensuring a clean and flush installation. It also acts as an additional gasket, providing extra protection against water ingress and foreign objects.

Lighting control



Color temperature



M
2700K




W
3000K


Finishes



Text White
R9003



Text Black
R9005



Text Brilliant
Grey R9006



Dopo aver fissato la staffa in metallo ed eseguito il cablaggio, il montaggio della lampada è rapido e intuitivo. Premendo i pulsanti laterali si agisce sulle apposite molle, sbloccando il sistema di aggancio; mantenendo la pressione, è sufficiente appoggiare la lampada sulla staffa. Una volta in posizione, rilasciando i pulsanti la lampada si aggancia automaticamente. Per la rimozione, basta premere nuovamente i pulsanti laterali e sganciare la lampada dalla staffa.

After securing the metal bracket and completing the wiring, the lamp can be installed quickly and intuitively. Pressing the side buttons acts on the dedicated springs, releasing the locking mechanism; while keeping them pressed, the lamp can simply be placed onto the bracket. Once correctly positioned, releasing the buttons automatically locks the lamp in place. To remove it, simply press the side buttons again and detach the lamp from the bracket.

Easy attachment

L'aggancio/sgancio facilitato consente un'installazione rapida del prodotto.

The easy attachment and detachment system ensures quick installation.

Side buttons

Basta premere i pulsanti laterali per montare/smontare la lampada.



Simply press the side buttons to quickly mount and remove the lamp.





Misty_R

topLED CRI 90 | 220-240 V
15 W DC - 18 W AC



ON
OFF

Opt 2700K 1875 lmS - 1577 lmD
☐ DI CA135AWHMDI
☒ DI CA135ABBMDI
☐ DI CA135AGGMDI

Opt 3000K 1923 lmS - 1690 lmD
☐ DI CA135AWHWDI
☒ DI CA135ABBWDI
☐ DI CA135AGGWDI



Opt 2700K 1875 lmS - 1577 lmD
☐ DI CA135CWHMDI
☒ DI CA135CBBMDI
☐ DI CA135CGGMDI



Opt 3000K 1923 lmS - 1690 lmD
☐ DI CA135CWHWDI
☒ DI CA135CBBWDI
☐ DI CA135CGGWDI

Finishes ☐ Text white R9003
☒ Text black R9005



Misty_Q

topLED CRI 90 | 220-240 V
15 W DC - 18 W AC



ON
OFF

Opt 2700K 1875 lmS - 1577 lmD
☐ DI CA137AWHMDI
☒ DI CA137ABBMDI
☐ DI CA137AGGMDI


Opt 3000K 1923 lmS - 1690 lmD
☐ DI CA137AWHWDI
☒ DI CA137ABBWDI
☐ DI CA137AGGWDI



Opt 2700K 1875 lmS - 1577 lmD
☐ DI CA137CWHMDI
☒ DI CA137CBBMDI
☐ DI CA137CGGMDI

Opt 3000K 1923 lmS - 1690 lmD
☐ DI CA137CWHWDI
☒ DI CA137CBBWDI
☐ DI CA137CGGWDI

☐ Text brilliant grey R9006

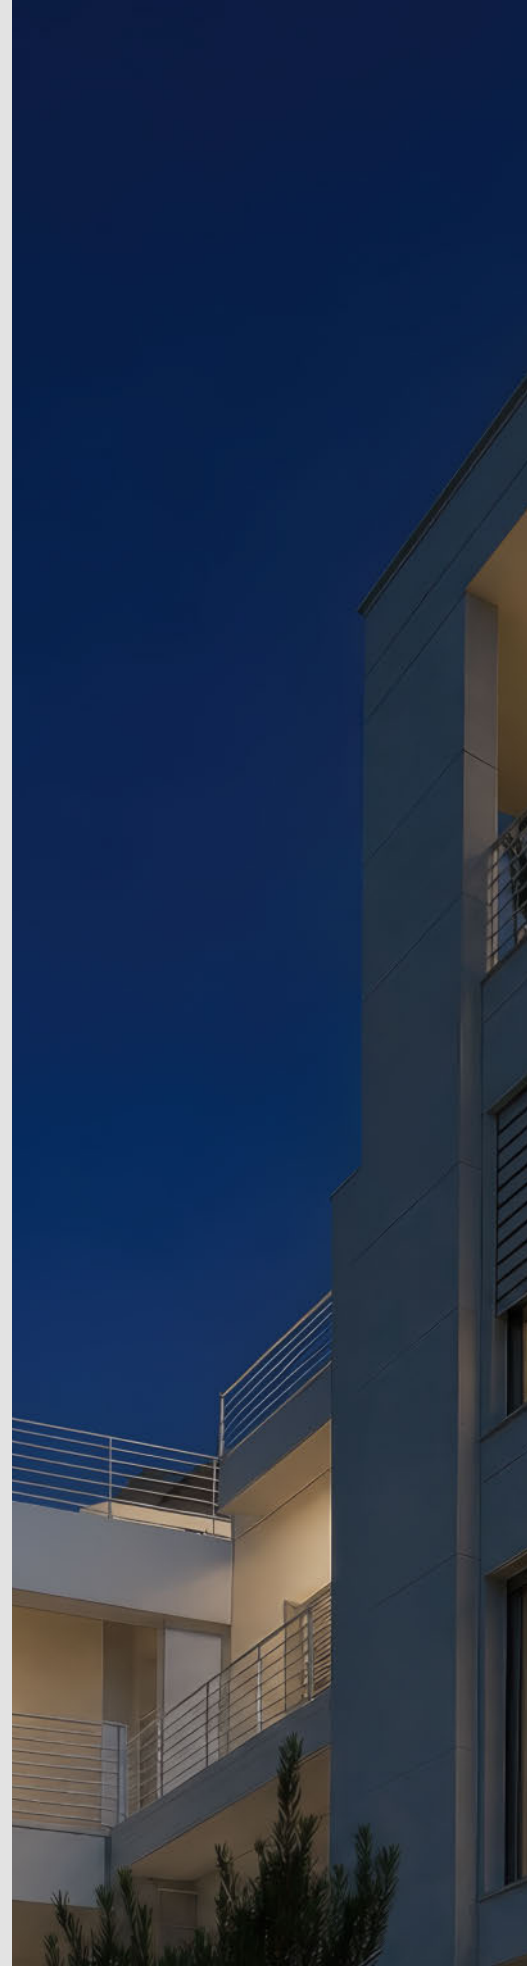



ADDRESSES

Linea Light HQ Italy

Via Europa, 14
31028 Vazzola TV
Italy

+39 0438 444826
info@linealight.com

Linea Light HUB Milano

Via Giovanni Boccaccio, 15/A
20123 Milano MI
Italy

+39 02 36750915
milano@linealight.com

Linea Light Nord-Est

Via Medoaco 4
c/o Hope Center
35135 Padova PD
Italy

+39 049 7969440
nordest@linealight.com

Linea Light Roma

Via La Spezia, 34
00182 Roma
Italy

+39 06 68589134
roma@linealight.com

Linea Light UK

Suite205 The business design center
52 Upper Street Islington
N10QH London
United Kingdom

+44 203 6371983
info@linealight.co.uk

Linea Light France

Zone Artisanale
12 A, rue des Artisans
68700 Cernay
France

+33 389 75 52 23
info@linealight.fr

Linea Light Deutschland

Aktienstraße 214
45473 Mülheim an der Ruhr
Germany

+49 208 299979-0
service@linealight.de

Linea Light Greece

538 Vouliagmenis Ave.
17456 Alimos Athens
Greece

+30 210 9940559
g.virinis@linealight.com

Linea Light Spain

C/ Longares, 48
28022 Madrid
Spain

+34 912534773
gestion@linealight.com

Linea Light USA - Inter Lux

3741 Commerce Drive - Suites 306-308
MD21227 Baltimore
USA

+1 410 381 1497
answers@inter-lux.com

Linea Light GCC

P.O. Box 125902
Jumeirah Lake Towers JBC2
35th Floor Office 04
Dubai UAE

+971 4 4218275
info@linealight.ae

Linea Light Asia - Pacific

No. 7, Nanyi Huayuan Road,
Industry Avenue, 528478 Xiaolan Town,
Zhongshan City, Guangdong Province
China

+86 760 87618355
info@linealight.com.cn

Linea Light Singapore

21 Kaki Bukit Place, 5th Fl.
416199 Singapore
Singapore

+65 6908 5758
info.sg@linealight.com

linealight.com

I disegni le quote, i materiali ed i colori della presente brochure si intendono a titolo indicativo. Nell'interesse della clientela, l'Azienda si riserva il diritto di modificare i modelli in ogni momento senza l'obbligo di preavviso. "Linea Light Group" si riserva il diritto, senza alcun preavviso di modificare le caratteristiche dei propri prodotti come la disponibilità degli stessi in qualunque momento. Tutti i prodotti, relativi dati tecnici, illustrazioni e informazioni presenti sulla brochure non sono vincolanti per "Linea Light Group". "Linea Light Group" non risponderà di eventuali errori illustrativi, testuali e/o di traduzione. Ulteriori caratteristiche dei prodotti sono contenute nelle relative schede tecniche e fogli istruzione. La presente brochure è tutelata dalla legge sui diritti d'autore (legge 22/04/1941 n. 633 e della legge 14/12/1942 n. 1485: di essa è proibita ogni riproduzione totale o anche parziale). Tutti i valori riportati sono valori di misurazione. I dati di flusso, CCT e potenza sono passibili di tolleranze di +/- 10 %.

The drawings, the measurements, the materials and the colours in this brochure are understood to be indicative. In the interest of the clientele, the company reserves the right to modify the models at any time and without any obligation of advance notice. "Linea Light Group" reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information in the brochure are binding for "Linea Light Group". "Linea Light Group" will not be held liable for any illustration, text and/or translation errors. More product characteristics are contained in the relative technical data sheets and instruction sheets. This brochure is protected by copyright (law 22/04/1941 No. 633 and law 14/12/1942 No. 1485: this prohibits any reproduction, total or even partial). All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.





LIGHT UP NEW IDEAS!

linealight.com