ECO FLEX 60 – 4000K

PRODUCT INFORMATION

Description	ECO FLEX 60 | 4000K | 8mm | IP20 | 24V | 94CRI | 4.8W | 368LM | 100mm Cut | VHB | 1000mm
Product Code	011-0109
Product Range	Eco Flex

PRODUCT SPECIFICATION

Dimensions	H2.00/W8.00mm
Cutting Interval	100mm
LED Pitch	16.7mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	4000K
Bin/step	3 SDCM
CRI Rating	94.00
Lifetime	> 50,000 h
Operating Temp	Min = -25°C, Max = 40°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or snap connectors
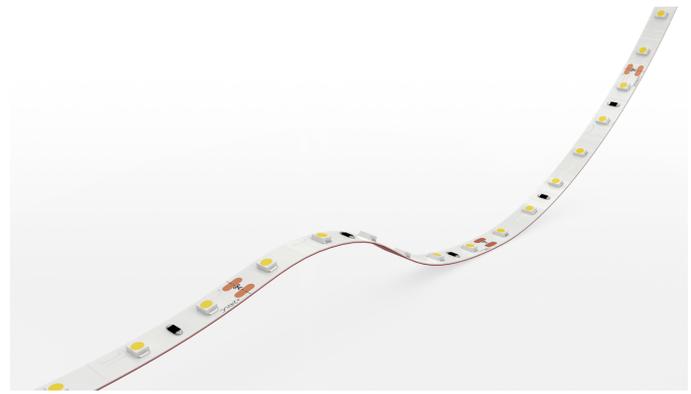
PERFORMANCE DATA (for 1000mm)

Power Consumption	4.80 W
Supply Voltage	24V DC
Supply Current	0.20 A
Luminous Flux	368.00lm/m
Lumen Efficiency	77.00lm/w
Max Power Length	5000mm
Beam Angle	120°

VHB Tape | UL | RoHs | PROFILES | POWER SUPPLIES | LM 79/80 COMPLIANT | DIMMABLE TECHNOLOGY

CONNECTORS | CE | 5 YEARS WARRANTY

TECHNICAL DRAWING

IP 20/54

+24VDC · 8 · 2 · 8.3 · 16.7 · 100 · +24V · -GND

LEDFLEX™

+44 (0) 203 137 7305
info@ledflexgroup.co.uk
www.ledflexgroup.com